
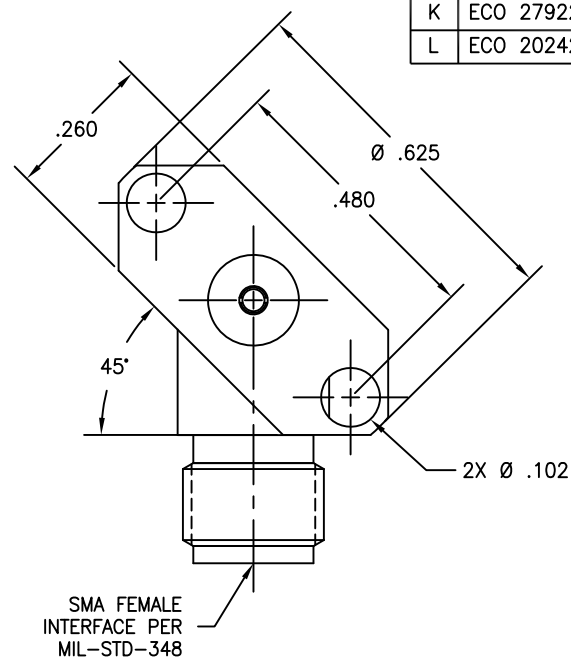


P/N	Ø A
-1CC	.0360±.0005
-1CCSF	.0360±.0005
-2CC	.0200±.0005
-2CCSF	.0200±.0005
-3CC	.0100±.0005
-3CCSF	.0100±.0005
-4CC	.0120±.0005
-4CCSF	.0120±.0005
-5CC	.0150±.0005
-5CCSF	.0150±.0005
-6CC	.0180±.0005
-6CCSF	.0180±.0005
-7CC	.0080±.0005

REVISIONS			
REV	DESCRIPTION	DATE	BY
J	ECO 20843	12.21.07	DKN
K	ECO 27922	07.14.15	DKN
L	ECO 202420 (ADD NEW NAME)	12.06.24	DKN

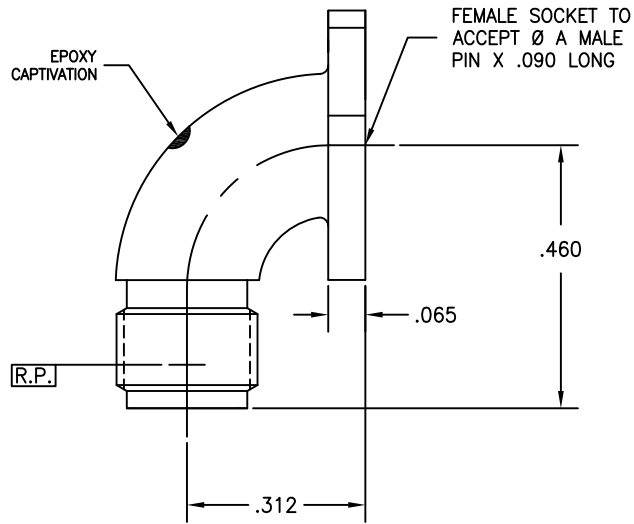

**MATERIAL(S):**  
 Body:  
 304 sst per SAE-AMS-5511.  
 Center Conductor:  
 BeCu alloy per ASTM B-196.  
 Dielectric:  
 PTFE per ASTM D-1710.  
 Epoxy:  
 Sigma VF Type HV.

**ELECTRICAL(S):**  
 Impedance: 50 Ohms nominal.  
 Frequency Range: DC to 18 GHz.  
 VSWR: 1.06 + .010 x f(GHz).  
 Insertion Loss: .10 dB max @ 6GHz.  
 Working Voltage: 335 Vrms max @ sea level.  
 Dielectric Withstanding Voltage: 1,500 Vrms min.  
 R.F. HiPot Voltage: 1,000 Vrms min @ 5MHz.  
 Corona Level: 375 Vrms @ 70,000 ft.  
 Insulation Resistance: 5,000 MegOhms min.  
 R.F. Leakage: -60 dB min. from 2-3 GHz.  
 Contact Resistance:  
 Initial:  
 Center Contact: 3.0 Milliohm max.  
 Outer Contact: 2.0 Milliohm max.  
 After Environment:  
 Center Contact: 4.0 Milliohm max.  
 Outer Contact: NA.

**MECHANICAL(S):**  
 Mating Characteristics:  
 Interface per Mil-Std-348.  
 Force To Engage & Disengage:  
 Torque: 2 inch-pounds max.  
 Longitudinal Force: NA.  
 Center Contact Retention Force:  
 Axial Force: 6 pounds min.  
 Center Contact Captivation:  
 Axial Force: 6 pounds max.  
 Radial Torque: 4 inch-ounces max.  
 Connector Durability:  
 500 cycles min @ 12 cycles/minute max.  
 Permeability: Less than 2.0 mu.

**ENVIRONMENTAL(S):**  
 Temp. Range: -65°C to +125°C (All Captivated)  
 -65°C to +165°C (Basic & SF)  
 Thermal Shock:  
 Mil-Std-202, Method 107, Test Cond. C.  
 Moisture Resistance:  
 Mil-Std-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity.  
 Corrosion:  
 Mil-Std-202, Method 101, Test Cond. B.  
 Vibration:  
 Mil-Std-202, Method 204, Test Cond. D.  
 Shock:  
 Mil-Std-202, Method 213, Test Cond. I.

**FINISH(ES):**  
 Body: (for CCSF's)  
 Passivate per ASTM A-967.  
 Body: (for CC's)  
 Gold plate per ASTM B-488, Type II, Code C, Class 0.25;  
 over nickel under plate per SAE-AMS-QQ-N-290, Class 1.  
 Center Conductor:  
 Gold plate per ASTM B-488, Type II, Code C, Class 1.25;  
 over nickel under plate per SAE-AMS-QQ-N-290, Class 1.

APPLICABLE AMPHENOL CDI DOCUMENTS		
WORK STD	PROD INST	ASSY INST
NA	NA	NA

**NOTICE**  
 THIS DRAWING EMBODIES A CONFIDENTIAL, PROPRIETARY DESIGN ORIGINATED BY AMPHENOL CDI AND ALL DESIGN, MANUFACTURING, RE-PRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIC PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE INTO OTHER PRODUCTS ANY FEATURE REGULAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY AMPHENOL CDI, CERRITOS, CA 90703

**TOLERANCES AND NOTES EXCEPT AS NOTED**  
 INTERPRET DRAWING PER ASME Y14.5-2018  
 DIMENSIONS ARE IN INCHES:  
 LINEAR .XX ±.015  
 .XXX ±.005 ANGLAR ± 1/2°  
 FRACTION ± 1/32

1. MACHINE FINISH: 32/RMS
2. BREAK ALL SHARP EDGES .003 MAX.
3. MACHINED FILLETS .005 MAX.
4. MACHINED SURFACES SQUARE TO RESPECTIVE AXES WITHIN .005 INCHES PER INCH.
5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R.
6. DIMENSIONS TO BE MET BEFORE PLATING.
7. CHAMFER ALL THREADS 45°.
8. THREADS PER 4-28.
9. REMOVE FRAYED EDGES ON TEFLON.
10. REMOVE ALL BURRS.

MATERIAL		SPECIFICATION		PROCUREMENT	
APPROVAL INITIALS	DATE	TITLE		12900 Alondra Blvd. Cerritos, CA 90703	
DRAWN BY R.C.	03.21.02	SMA FEMALE RADIUS R/A 2 HOLE FLANGE (.260 X .625) MOUNT (45° LEFT) FIELD REPLACEABLE			
CHECKED BY		SCALE	DIRECTORY/SUB-DIRECTORY	SHEET 1 OF 1	
TEST ENGG		6:1	OUTLINE		
DESIGN ENGG	ATV 06.19.02	SIZE	CAGE CODE	DRAWING NO.	REV.
MFG ENGG		C	30990	5659	L
ECO APPRV	DNg 12.06.24				