


PART NO.	CAPTIVAION METHOD
BASIC	NONE
SF	NONE
CC	EPOXY ONLY
CCSF	EPOXY ONLY
CCCE	EPOXY WITH CONDUCTIVE
CCCESF	EPOXY WITH CONDUCTIVE

REVISIONS			
REV.	DESCRIPTION	DATE	BY
A	ECO 22161	04.24.09	DKN
B	ECO 204053 (REDRAW SW W/CHG)	07/03/2025	DKN

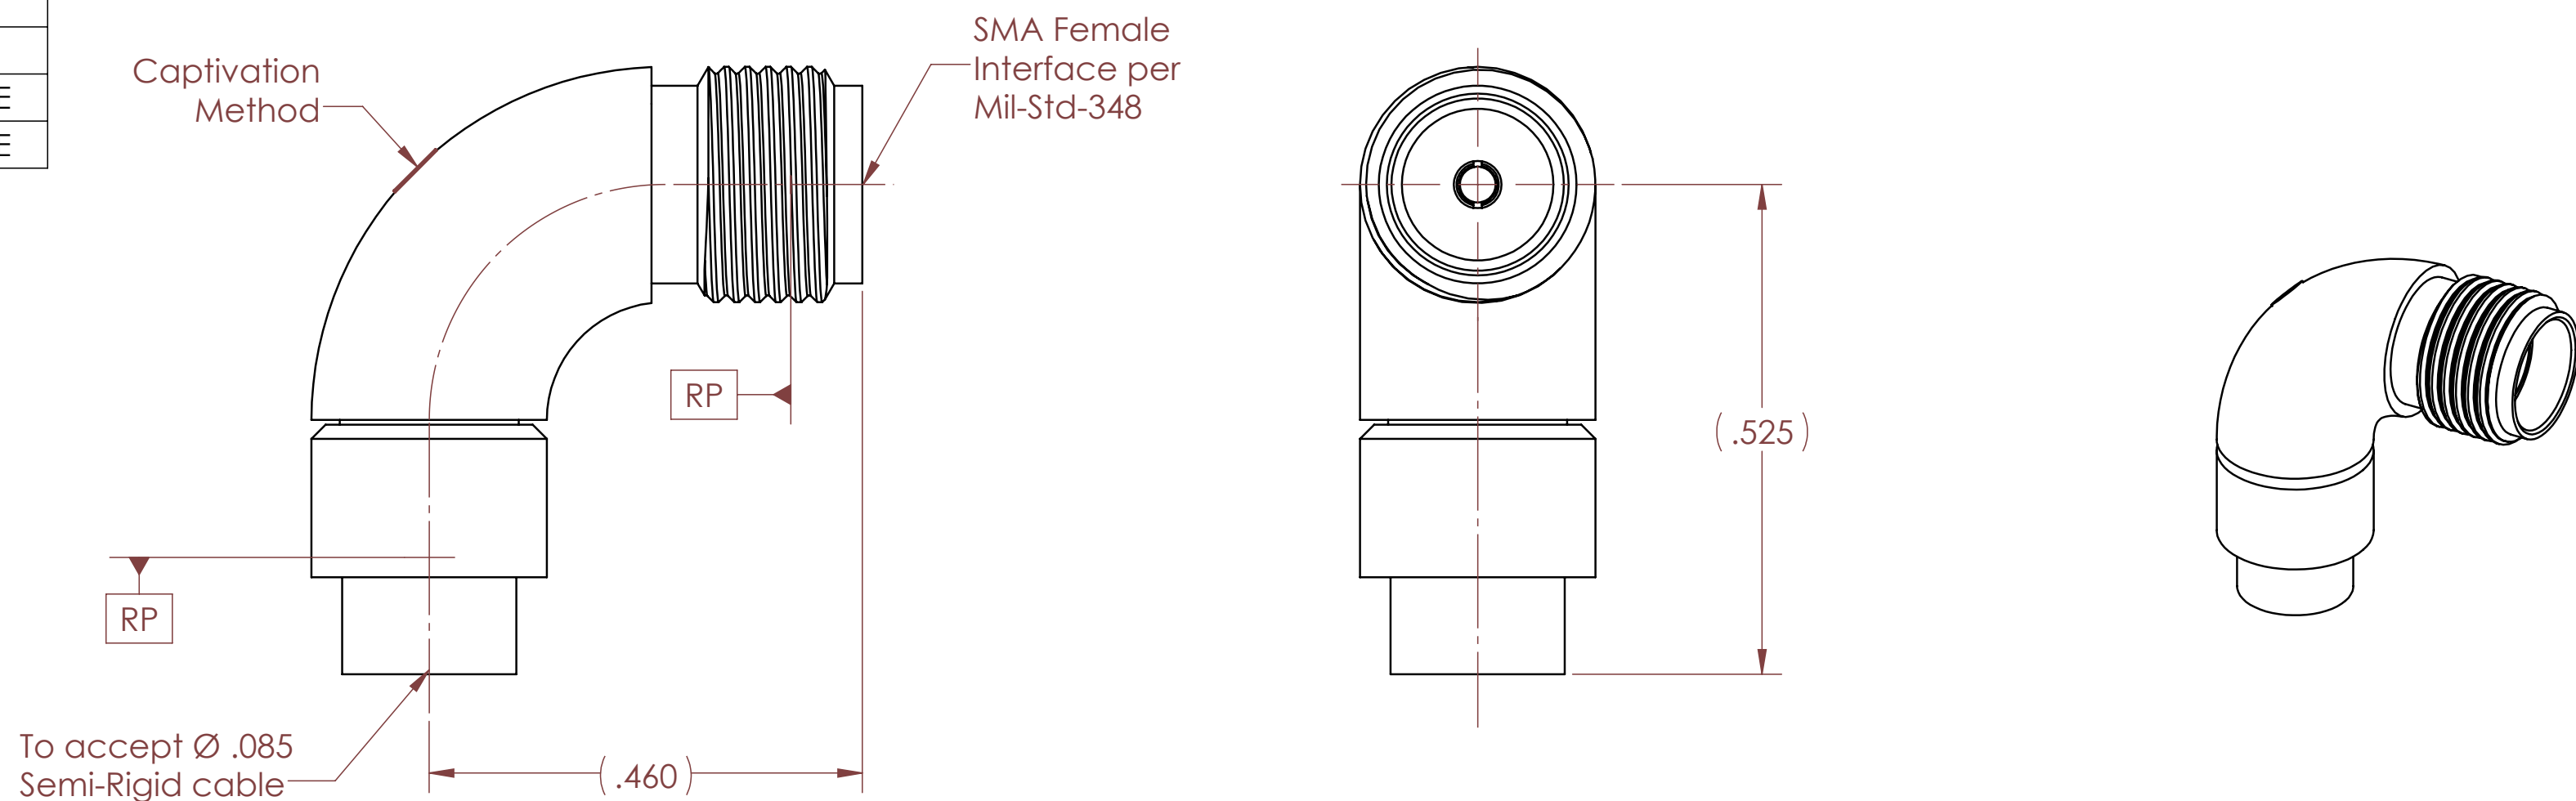

MATERIAL(S):	ELECTRICAL(S):	MECHANICAL(S):	ENVIRONMENTAL(S):
Body Sub-Assembly: 303 SST per ASTM A582 and 304 SST per SAE-AMS5370 Center Conductor: BeCu Alloy per ASTM B196 Insulator: PTFE Teflon per ASTM D1710 Epoxy: (For CC's) ** Sigma VF type HV Conductive Epoxy: (For CCCE's) ** Eccobond 56C  ** Not applicable to P/N. 5235-2 & 5235-2SF	Impedance: 50 Ohms Nominal Frequency Range: DC to 18.0 GHz VSWR: 1.30:1 max @ 18GHz Insertion Loss: .20 dB max at 18GHz Working Voltage: 335 Vrms max @ Sea Level Dielectric Withstand Voltage: 1,000 Vrms min. RF HiPot Voltage: 670 Vrms min. @ 5MHZ Corona Level: 375 Vrms @ 70,000 ft Insulation Resistance: 5,000 MegOhms min. RF Leakage: -(65 - fGHz) dB (For CC's). RF Leakage: -(90 - fGHz) dB (For BASIC & SF's). Contact Resistance: Before Environment: Center Contact: 4.0 Milliohms max Outer Contact: 2.0 Milliohms max After Environment: Center Contact: 6.0 Milliohms max Outer Contact: NA	Mating Characteristics: Interface per MIL-STD-348 Force to Engage & Disengage: Torque: 2 inch-lbs max Longitudinal Force: NA Center Contact Retention: Axial Force: 6 lbs min. Connector Durability: 500 Cycles min. @ 12 cycles/minute max Permeability: Less than 2.0 mu. Cable Retention Force: Axial Force: 60 lbs min.	Temperature Range: -65°C to +125°C (For CC's) -65°C to +165°C (For -2 & -2SF)  Thermal Shock: MIL-STD-202, Method 107, Test Condition B Moisture Resistance: MIL-STD-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity. Corrosion: MIL-STD-202, Method 101, Test Condition B Vibration: MIL-STD-202, Method 204, Test Condition D Shock: MIL-STD-202, Method 213, Test Condition I

FINISH(ES):	APPLICABLE Amphenol CDI DOCUMENTS	TOLERANCES AND NOTES	MATERIAL	SPECIFICATION	PROCUREMENT																						
Body Sub-Assembly: (For SF's): Passivated per ASTM A967 or SAE AMS 2700. (For BASIC & CC's): Gold plate per ASTM B488, type II, code C, Class .25, over Nickel plate per SAE AMS-QQ-N-290, Class 1. Center Conductor: Gold plate per ASTM B488, type II, code C, Class 1.25 ,over Nickel plate per SAE AMS-QQ-N-290, Class 1.	<table border="1"> <thead> <tr> <th>WORK STANDARD</th> <th>PROD INSTRUC</th> <th>ASSY INSTRUC</th> </tr> </thead> <tbody> <tr> <td>NA</td> <td>NA</td> <td>AI-122</td> </tr> </tbody> </table>	WORK STANDARD	PROD INSTRUC	ASSY INSTRUC	NA	NA	AI-122	EXCEPT AS NOTED DIMENSIONS ARE IN INCHES. .XX ± .015 LINEAR .XXX ± .005 ANGULAR ± 1/2° FRACTION ± 1/32 INTERPRET DRAWING PER ASME Y14.5 - 2018 1. MACHINE FINISH: 63/ RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECT- IVE AXIS WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET AFTER PLATING. 7. CHAMFER ALL THREADS 45°. 8. THREADS PER H-28 9. REMOVE FRAYED EDGES ON TEFLON. 10. REMOVE ALL BURRS.	<table border="1"> <thead> <tr> <th>APPROVAL INITIALS</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>IMG</td> <td>3.15.02</td> </tr> <tr> <td>CHECKED BY</td> <td>-</td> </tr> <tr> <td>TEST ENGR</td> <td>-</td> </tr> <tr> <td>QUALITY</td> <td>-</td> </tr> <tr> <td>DESIGN ENG</td> <td>ATV 03.10.08</td> </tr> <tr> <td>MFG. ENGR</td> <td>-</td> </tr> <tr> <td>ECO APPRV</td> <td>DNg 07.09.25</td> </tr> </tbody> </table>	APPROVAL INITIALS	DATE	IMG	3.15.02	CHECKED BY	-	TEST ENGR	-	QUALITY	-	DESIGN ENG	ATV 03.10.08	MFG. ENGR	-	ECO APPRV	DNg 07.09.25	12900 Alondra Blvd. Cerritos, CA 90703  <b>Amphenol CDI</b> TITLE SMA FEMALE RADIUS R/A TO Ø.141 SEMI-RIGID CABLE SCALE 6:1 SUB-DIRECTORY/ _OUTLINE\ SHEET 1 OF 1 SIZE CAGE CODE DRAWING NO. REV. C 30990 OL_5235-2 B	
WORK STANDARD	PROD INSTRUC	ASSY INSTRUC																									
NA	NA	AI-122																									
APPROVAL INITIALS	DATE																										
IMG	3.15.02																										
CHECKED BY	-																										
TEST ENGR	-																										
QUALITY	-																										
DESIGN ENG	ATV 03.10.08																										
MFG. ENGR	-																										
ECO APPRV	DNg 07.09.25																										